


Alphabet Of Light Linear 120 suspension

1204008A

SPECIFICATIONS



Design By
BJARKE INGELS GROUP

Collection
Architectural



Specifications	
Delivered lumens	3484lm
Light output ratio	100lm/W
Power consumption	35W
Led type	29.5W Array*
CCT (Correlated Color Temperature)	3000K
CRI (Color Rendering Index)	>80
Life expectancy	50000Hrs
Control type	Dimmable 2-Wire / Dimmable 0-10V**
Input Voltage	120-277V
Driver	ENEDO - 1 x RCL040-0800A

*Integrated light source **2-wire dimming at 120VAC only

Colors & Finishes

- ☐ White (diffuser & canopy)
- ☐ Grey (body)


Materials

- Illuminated tubes in opaque injection molded PMMA resin
- 360° light emission
- Aluminum frame suspended by steel cables

Features & Accessories

- Suitable for damp locations
- Driver is compatible to both 2-wire dimming and 0-10V dimming options

Dimensions

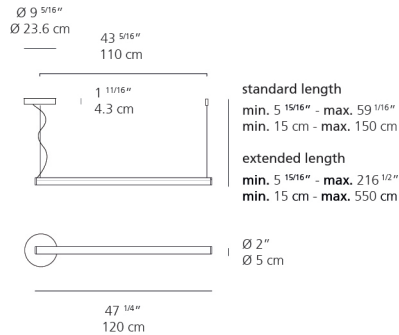

Packaging

1 Box

1 x 75-11/16" x 12-1/8" x 12-1/8" / 11.38 lbs - 192 cm x 30.5 cm x 30.5 cm / 5.16 kg

Light distribution

Direct/Indirect

Luminaire weight

4.74 lbs / 2.15 kg

Warranty

Red = Max Cd. Through Vertical plane
Blue = Max Cd. Through Horizontal plane