

EGO

BY
ERNESTO GISMONDI







ERNESTO GISMONDI

Ernesto Gismondi is the founder of Artemide Group.

He was born in Sanremo (IM) on December 25, 1931. In 1957 he gained a degree in Aeronautical Engineering at the Milan Polytechnic and in 1959 he gained a degree in Missile Engineering at the Professional School of Engineering in Rome.

Since the early '60s he has been devoting to the planning and production of lighting equipment, founding Studio Artemide S.a.s., from which the Artemide Group was to develop, together with designer Sergio Mazza. He became established as an international designer, participating, as one of the inventors, in "Memphis", an avant-garde movement that brought about a profound evolution in the design sector both in Italy and worldwide, and designing various successful appliances for the Group.

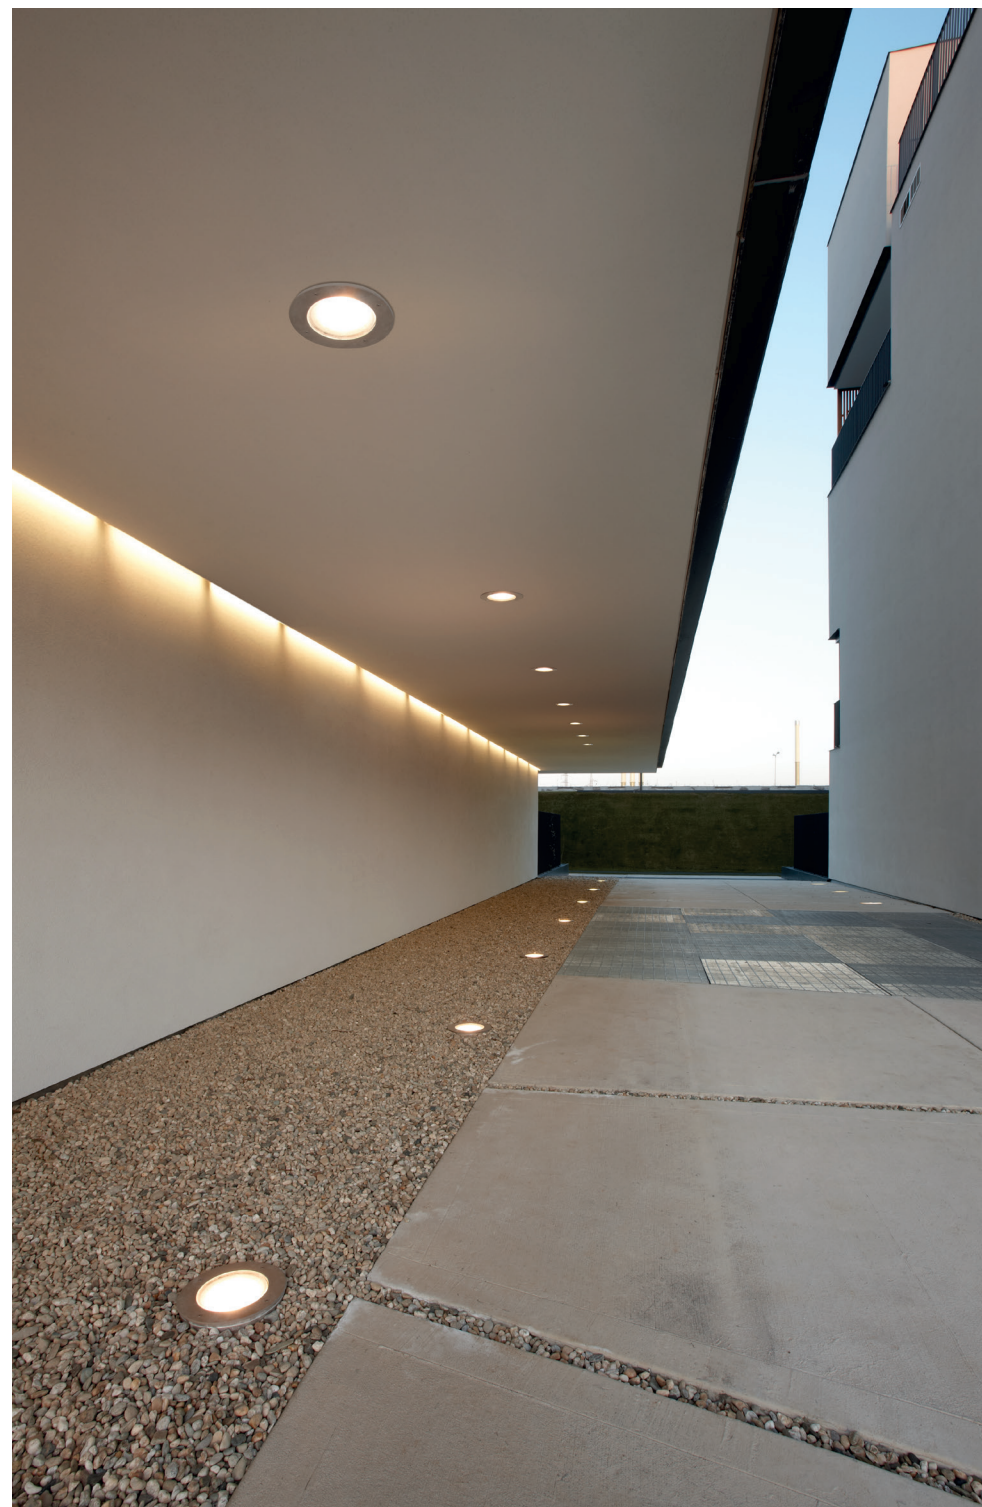

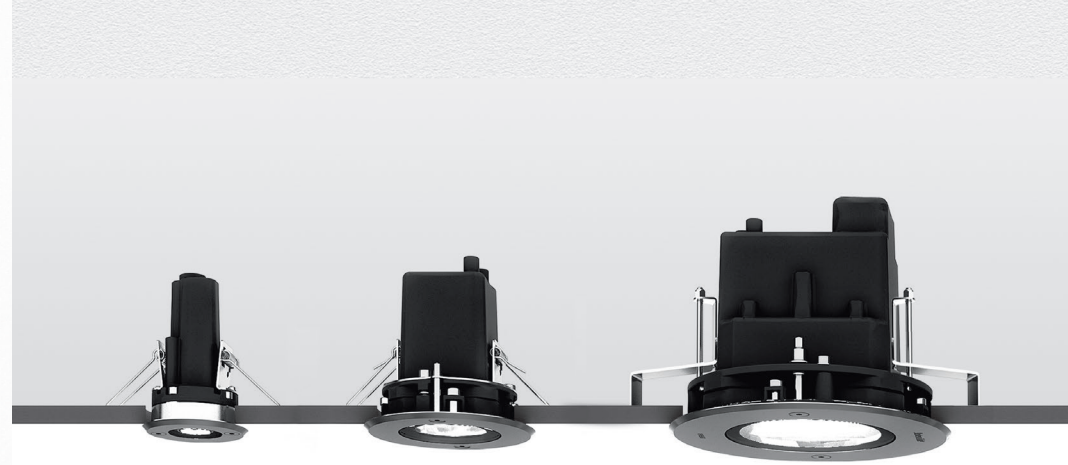

FUNCTIONALITY

At a crossroad between functionality and versatility, Ego is available in ceiling and floor models, in three sizes, and in grey white or stainless steel finishes, featuring three beam options (spot, flood, or wall washer) and its body's adjustable range.





TECHNOLOGY

Available in drive-over and downlight round or square models, Ego features direct and indirect light emission from high-performance LEDs that ensure environmental friendly lighting and durability.



SIMPLICITY

Composed of stainless steel frame and black silkscreen, tempered, non-slippery tempered glass, Ego creates a harmonious balance between form and function.

EGO DOWNLIGHT ROUND ceiling

EGO 55 DOWNLIGHT ceiling




EMISSION
direct

LIGHT SOURCE
LED
1.5W >80 CRI
3000K or 4000K
14°, 32° or 16°x34°

DIMMING FEATURE
standard non dimmable

DIMENSIONS



FINISH

- stainless steel
- white RAL9002

CERTIFICATIONS
c.UL.us listed

EGO 90 DOWNLIGHT ceiling




EMISSION
direct

LIGHT SOURCE
LED
3.5W >80 CRI
3000K or 4000K
10°, 24°, 10°x40°

DIMMING FEATURE
standard non dimmable

DIMENSIONS



FINISH

- stainless steel
- white RAL9002

CERTIFICATIONS
c.UL.us listed

EGO 150 DOWNLIGHT ceiling




EMISSION
direct

LIGHT SOURCE
LED
5W >80 CRI
3000K or 4000K
5°, 38°, 6°x54°

DIMMING FEATURE
standard non dimmable

DIMENSIONS



FINISH

- stainless steel
- white RAL9002

CERTIFICATIONS
c.UL.us listed

EGO DOWNLIGHT SQUARE ceiling

EGO 55 DOWNLIGHT ceiling




EMISSION
direct

LIGHT SOURCE
LED
1.5W >80 CRI
3000K or 4000K
14°, 32° or 16°x34°

DIMMING FEATURE
standard non dimmable

DIMENSIONS



FINISH

■ stainless steel
■ white RAL9002

CERTIFICATIONS
c.UL.us listed

EGO 90 DOWNLIGHT ceiling




EMISSION
direct

LIGHT SOURCE
LED
3.5W >80 CRI
3000K or 4000K
10°, 24°, 10°x40°

DIMMING FEATURE
standard non dimmable

DIMENSIONS



FINISH

■ stainless steel
■ white RAL9002

CERTIFICATIONS
c.UL.us listed

EGO 150 DOWNLIGHT ceiling




EMISSION
direct

LIGHT SOURCE
LED
5W >80 CRI
3000K or 4000K
5°, 38°, 6°x54°

DIMMING FEATURE
standard non dimmable

DIMENSIONS






FINISH




■ stainless steel
■ white RAL9002

CERTIFICATIONS
c.UL.us listed

EGO DRIVE-OVER ROUND floor

EGO 55 DRIVE-OVER floor	EGO 90 DRIVE-OVER floor	EGO 150 DRIVE-OVER floor
		
EMISSION direct	EMISSION direct	EMISSION direct
LIGHT SOURCE LED 1.5W >80 CRI 3000K or 4000K 14°, 32° or 16°x34°	LIGHT SOURCE LED 3.5W >80 CRI 3000K or 4000K 10°, 24°, 10°x40°	LIGHT SOURCE LED 5W >80 CRI 3000K or 4000K 5°, 38°, 6°x54°
DIMMING FEATURE standard non dimmable	DIMMING FEATURE standard non dimmable	DIMMING FEATURE standard non dimmable
DIMENSIONS 	DIMENSIONS 	DIMENSIONS 
FINISH  stainless steel	FINISH  stainless steel	FINISH  stainless steel
CERTIFICATIONS c.UL.us listed	CERTIFICATIONS c.UL.us listed	CERTIFICATIONS c.UL.us listed

EGO DRIVE-OVER SQUARE floor

EGO 55 DRIVE-OVER floor	EGO 90 DRIVE-OVER floor	EGO 150 DRIVE-OVER floor
		
EMISSION direct	EMISSION direct	EMISSION direct
LIGHT SOURCE LED 1.5W >80 CRI 3000K or 4000K 14°, 32° or 16°x34°	LIGHT SOURCE LED 3.5W >80 CRI 3000K or 4000K 10°, 24°, 10°x40°	LIGHT SOURCE LED 8W >80 CRI 3000K or 4000K 10°, 38°, 6°x54°
DIMMING FEATURE standard non dimmable	DIMMING FEATURE standard non dimmable	DIMMING FEATURE standard non dimmable
DIMENSIONS 	DIMENSIONS 	DIMENSIONS 
FINISH  stainless steel	FINISH  stainless steel	FINISH  stainless steel
CERTIFICATIONS c.UL.us listed	CERTIFICATIONS c.UL.us listed	CERTIFICATIONS c.UL.us listed

*For **retail sales** contact information, please visit*
www.artemide.net/store-locator



*For **contract sales** contact information, please visit*
www.artemide.net/contract-sales